

ABSOLUTE MAXIMUM RATING (T case = 25°C unless otherwise stated)		(EC-10)16	(EC-10)20
V <sub>DSX</sub>	Drain - Source Voltage	160V	200V
V <sub>GSS</sub>	Gate - Source Voltage	±14V	
I <sub>D</sub>	Continuous Drain Current	8 A	
I <sub>D(PK)</sub>	Body Drain Diode	8 A	
P <sub>D</sub>	Total Power Dissipation @ (T case = 25°C)	125W	
T <sub>stg</sub>	Storage Temperature Range	-55 to 150°C	
T <sub>j</sub>	Maximum Operating Junction Temperature	150°C	
RθJC	Thermal Resistance Junction - case	1.0°C/W	

STATIC CHARACTERISTICS (T case = 25°C unless otherwise stated)

Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
		(EC-10)16	(EC-10)20	(EC-10)20	
BV <sub>DSX</sub> Drain - Source Breakdown Voltage	V <sub>GS</sub> = -10V	160			V
	ID = 10mA	200			V
BV <sub>GSS</sub> Gate - Source Breakdown Voltage	V <sub>DS</sub> = 0 IG = ±100uA	±14			V
V <sub>GS(OFF)</sub> Gate-Source Cut-Off Voltage	V <sub>DS</sub> = 10V ID = 100mA	0.15		1.5	V
V <sub>DS(SAT)*</sub> Drain - Source Saturation Voltage	V <sub>GD</sub> = 0 ID = 8A			12	V
I <sub>DSX</sub> Drain - Source Cut - Off Current	V <sub>GS</sub> = -10V	V <sub>DS</sub> = 160V (EC-10)16		10	mA
		V <sub>DS</sub> = 200V (EC-10)20		10	
Y <sub>fs*</sub> Forward Transfer Admittance	V <sub>DS</sub> = 10V ID = 3A	0.7		2	S


DYNAMIC CHARACTERISTICS (T case = 25°C unless otherwise stated)

Characteristic	Test Conditions	N-Channel	P-Channel	UNIT
		TYPICAL		
C <sub>iss</sub> Input Capacitance	V <sub>DS</sub> = 10V f = 1 MHz	500	700	pF
C <sub>oss</sub> Output Capacitance		300	300	
C <sub>rss</sub> Reverse Transfer Capacitance		10	25	
t <sub>on</sub> Turn-on Time	V <sub>DS</sub> = 20V	100	120	ns
t <sub>off</sub> Turn-off Time	ID = 5A	50	60	


\*Pulse Test: Pulse width = 300uS, Duty Cycle ≤ 2%

## Typical Characteristics for 125W Devices.


Power vs. Temperature Derating

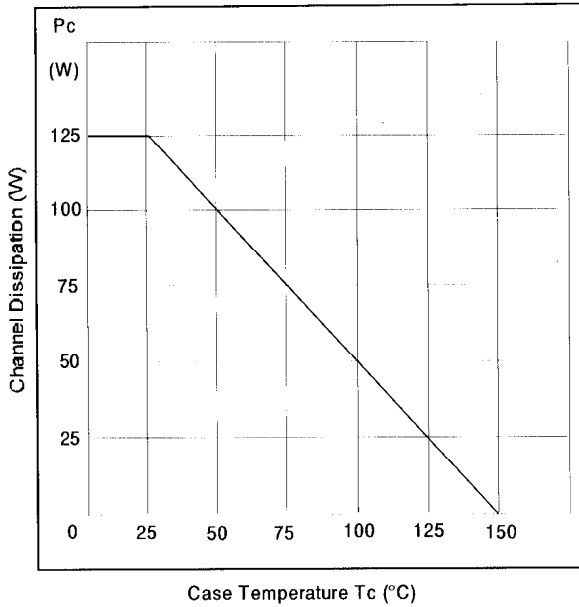


Maximum Safe Operating Area

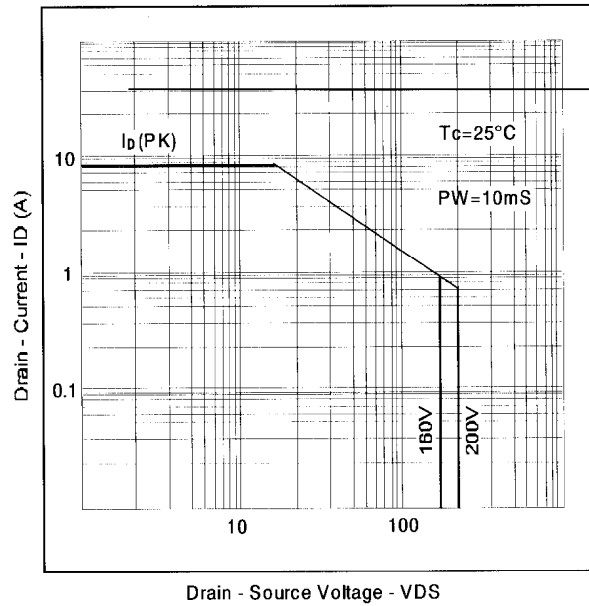

Typical Output (N-Channel)

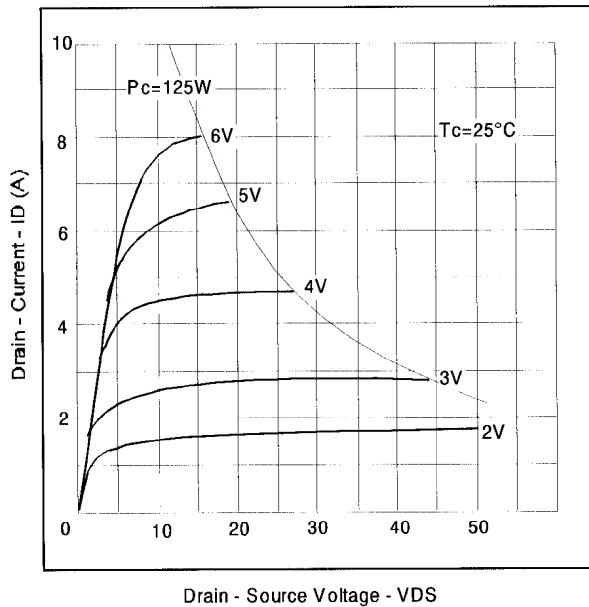


Typical Output (P-Channel)

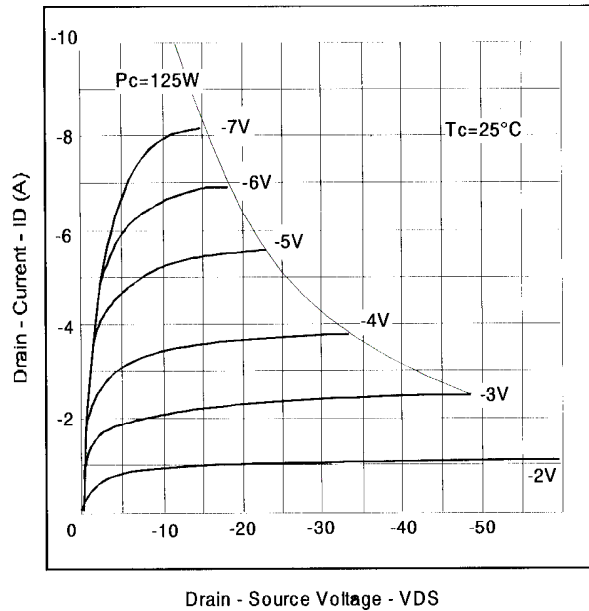


## Typical Characteristics for 125W Devices (cont.)


Typical Transfer Characteristics (N-Channel)

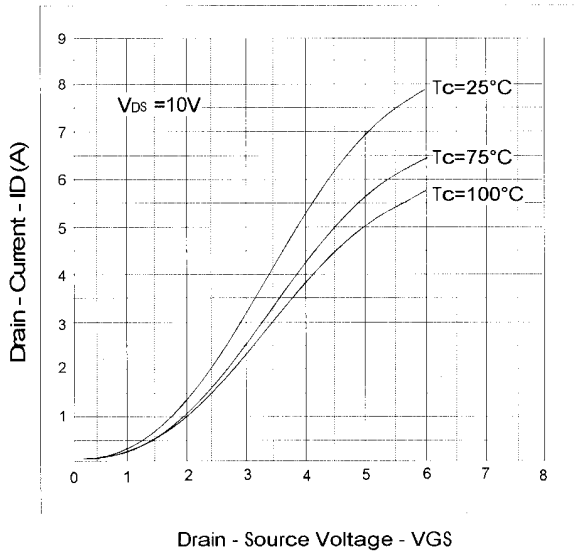


Typical Transfer Characteristics (P-Channel)

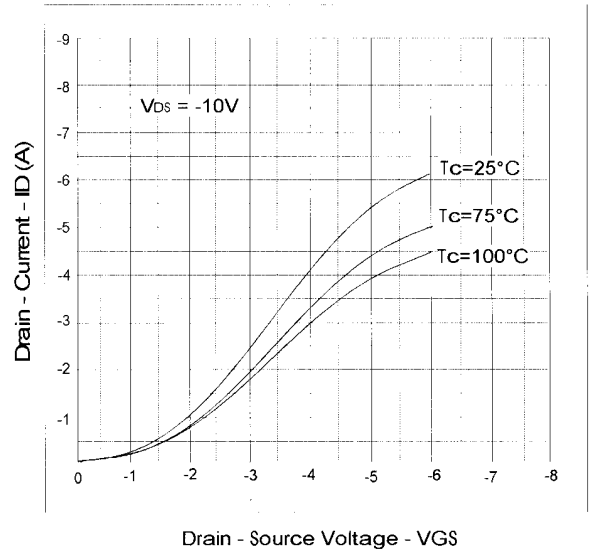

Forward Transfer Admittance (N-Channel)

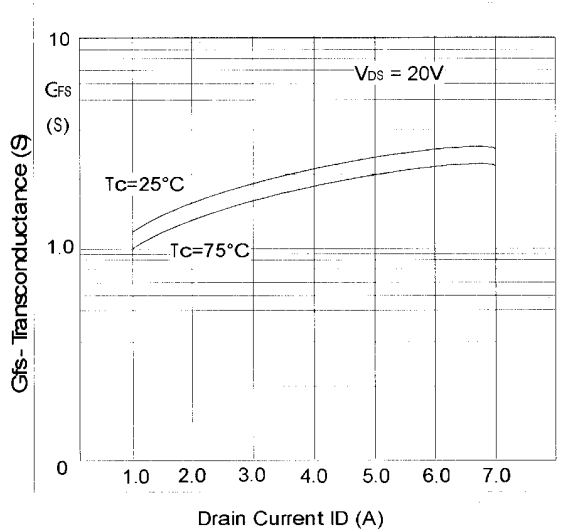

Forward Transfer Admittance (P-Channel)

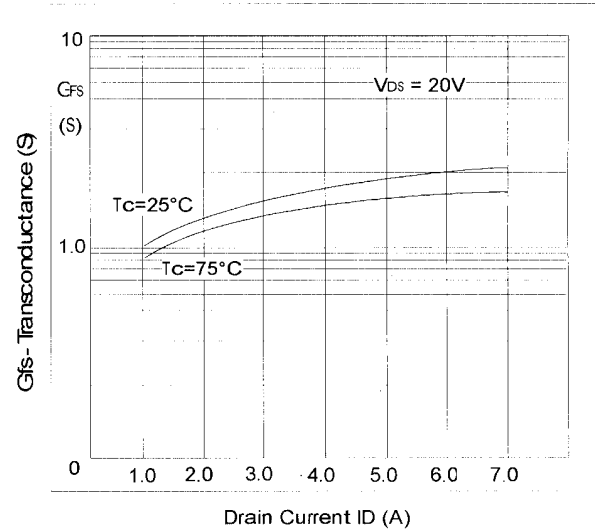

Version 1.1

Exicon © is copyrighted and is a mark of Profusion plc. The information provided herein is believed to be reliable; however Profusion assumes no responsibility for inaccuracies or omissions. Profusion assumes no responsibility for the use of this information, and all use of such information shall be entirely at the users own risk. Specifications are subject to change without notice.